



# Powerware

## Powerware ePDU Datasheets: Basic Technology, 16 Amp UK ePDUs

Product Focus


Designed for high-density, mission-critical server applications, the Eaton Powerware ePDU provides reliable power to Data Centres for both standard and Blade servers.

Powerware ePDUs are available in multiple configurations and in both vertical (0U) and 19" horizontal rack mountings. Powerware Basic ePDUs ensure easy management and offer a scalable solution for your current and future requirements.

Key benefits include simplicity of use, rugged aluminium chassis, numerous standard built-in options, multiple choices of socket orientation and external earth tags, all designed to suit the latest rack and enclosure designs.

### Features

- **Up to 3 types of socket available in one ePDU**
- **High quality sockets** ensure maximum reliability
- **Isolation mounting** expands cabinet grounding options
- **Multi-option mounting** improves installation flexibility - have confidence that the strip can be adapted to suit any on-site rack configuration.
- **UK, C13 and C19 sockets as standard**, UK sockets available with a choice of orientation at 45-degree steps and feature self-adjusting cable terminations for increased safety and reliability. Ask for options on Schuko and French sockets.
- **Tough yet attractive aluminium body** with polycarbonate end caps for the ultimate in style and strength.

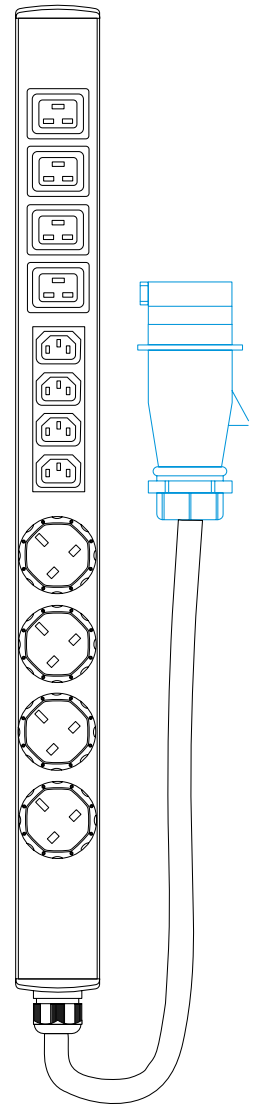

Basic

-

Metered

-

Monitored

-

Switched

-

Managed

# Technical specifications

Powerware ePDU Datasheets:

Basic Technology, 16 Amp UK ePDUs

Part Number	Form*	Input Plug	Lead Length	Outlet type1	Qty	Outlet type 2	Qty	Outlet type 3	Qty	Dimensions HxWxD
PW104BA0UA06	0U	EN60309	3M	UK	12					823 x 57 x 48
PW104BA0UA07	0U	EN60309	3M	UK	16					1119 x 57 x 48
PW104BA0UA08	0U	EN60309	3M	UK	20					1355 x 57 x 48
PW104BA0UA09	0U	EN60309	3M	UK	24					1591 x 57 x 48
PW104BA0UA13	0U	EN60309	3M	UK	12	C13	8			1002 x 57 x 48
PW104BA0UA14	0U	EN60309	3M	UK	16	C13	4			1134 x 57 x 48
PW104BA0UA15	0U	EN60309	3M	UK	8	C19	8			898 x 57 x 48
PW104BA0UA21	0U	EN60320 C20	2M	UK	12					823 x 57 x 48
PW104BA0UA22	0U	EN60320 C20	2M	UK	16					1024 x 57 x 48
PW104BA0UA23	0U	EN60320 C20	2M	UK	20					1264 x 57 x 48
PW104BA0UA24	0U	EN60320 C20	2M	UK	24					1500 x 57 x 48
PW104BA0UA25	0U	EN60320 C20	2M	UK	12	C13	8			1002 x 57 x 48
PW104BA0UA26	0U	EN60320 C20	2M	UK	16	C13	4			1134 x 57 x 48
PW104BA0UA27	0U	EN60320 C20	2M	UK	8	C19	8			898 x 57 x 48
PW104BA0UA28	0U	Unterminated	2M	UK	6					436 x 57 x 48
PW104BA0UA29	0U	Unterminated	2M	UK	12					782 x 57 x 48
PW104BA0UA30	0U	Unterminated	2M	UK	16					1024 x 57 x 48
PW104BA0UA31	0U	Unterminated	2M	UK	20					1264 x 57 x 48
PW104BA0UA32	0U	Unterminated	2M	UK	24					1500 x 57 x 48
PW104BA0UA33	0U	Unterminated	2M	UK	12	C13	8			1002 x 57 x 48
PW104BA0UA34	0U	Unterminated	2M	UK	16	C13	4			1134 x 57 x 48
PW104BA0UA35	0U	Unterminated	2M	UK	8	C19	8			898 x 57 x 48
PW104BA0UA52	0U	EN60309	3M	C13	12					480 x 57 x 48
PW104BA0UA53	0U	EN60320 C20	3M	C13	20					720 x 57 x 48
PW104BA0UA58	0U	EN60309	3M	C19	8					500 x 57 x 48
PW104BA0UA59	0U	EN60309	3M	C19	16					860 x 57 x 48
PW104BA0UA65	0U	EN60320 C20	2M	C13	8					436 x 57 x 48
PW104BA0UA66	0U	EN60320 C20	2M	C13	12					480 x 57 x 48
PW104BA0UA67	0U	EN60320 C20	2M	C13	16					600 x 57 x 48
PW104BA0UA68	0U	Unterminated	2M	C13	8					436 x 57 x 48
PW104BA0UA69	0U	Unterminated	2M	C13	12					480 x 57 x 48
PW104BA0UA70	0U	Unterminated	2M	C13	16					600 x 57 x 48
PW104BA1UB44	1U	EN60309	3M	C13	8					482 x 45 x 190
PW104BA1UB48	1U	EN60320 C20	2M	C13	8					482 x 45 x 190
PW104BA1UB49	1U	Unterminated	2M	C13	8					482 x 45 x 190
PW104BA1UB50	1U	EN60309	3M	C13	12					482 x 45 x 190
PW104BA1UB54	1U	EN60320 C20	2M	C13	12					482 x 45 x 190
PW104BA1UB55	1U	Unterminated	2M	C13	12					482 x 45 x 190
PW108BA2UB56	2U	EN60309	3M	C13	2 x 10					482 x 90 x 300
PW104BA2UB56	2U	EN60309	3M	C13	20					482 x 90 x 300
PW104BA0UB76	0U	EN60309	3M	C13	12	C19	4			
PW104BA0UB78	0U	EN60320 C20	2M	C13	8					685 x 41 x 41
PW104BA0UB79	0U	EN60320 C20	2M	C13	16					394 x 41 x 41
PW104BA0UB83	0U	Unterminated	2M	UK	4	C13	4	C19	2	626 x 57 x 48
PW104BA0UB92	0U	EN60309	3M	C13	24					780 x 57 x 48
PW104BA0UB96	0U	EN60309	3M	C13	20	C19	4			
PW104BA0UB97	0U	EN60320 C20	3M	C13	20	C19	4			
PW104BA1UB98	1U	EN60320 C20	3M	C13	10	C19	2			
PW104BA0UB99	0U	EN60309	3M	C13	20					720 x 57 x 48

Eaton, Powerware, ePDU are trade names, trademarks, and/or service marks of Eaton Corporation or its subsidiaries and affiliates.

© 2008 Eaton Corporation.

All Rights Reserved.

[www.powerware.com](http://www.powerware.com)

CZECH  
Tel: +420 272 760 365  
[UPSInfoCzech@eaton.com](mailto:UPSInfoCzech@eaton.com)

FINLAND  
Tel: +358 9 452 661  
[PowerwareMyynti@eaton.com](mailto:PowerwareMyynti@eaton.com)

GERMANY  
Tel: +49 7841 6040  
[infogermany@eaton.com](mailto:infogermany@eaton.com)

NORWAY  
Tel: +47 23 03 65 50  
[SalesNorway@eaton.com](mailto:SalesNorway@eaton.com)

RUSSIA  
Tel: +7 495 981 37 70  
[UPSRussia@eaton.com](mailto:UPSRussia@eaton.com)

SWEDEN  
Tel: +46 8 598 940 00  
[infosweden@eaton.com](mailto:infosweden@eaton.com)

DENMARK  
Tel: +45 3686 7910  
[UPSSalesDenmark@eaton.com](mailto:UPSSalesDenmark@eaton.com)

FRANCE  
Tel: +33 1 60 12 74 00  
[powerware.france@eaton.com](mailto:powerware.france@eaton.com)

ITALY  
Tel: +39 02 95542 309  
[info@powerware.it](mailto:info@powerware.it)

POLAND  
Tel: +48 22 331 85 24  
[upssalespoland@eaton.com](mailto:upssalespoland@eaton.com)

SLOVAKIA  
Tel: +421 2 4463 7046  
[InfoSk@Eaton.com](mailto:InfoSk@Eaton.com)

UAE  
Tel: +971 4 881 19 33  
Fax: +971 4 881 19 39

SPAIN  
Tel: +34 475 32 03  
[infoespana@eaton.com](mailto:infoespana@eaton.com)

UNITED KINGDOM  
Tel: +44 1753-608 700  
[acukpowerware@eaton.com](mailto:acukpowerware@eaton.com)



**Powerware**