



# Powerware

## Powerware ePDU Datasheets: Basic Technology, 32 Amp UK ePDUs

Product Focus


Designed for high-density, mission-critical server applications, the Eaton Powerware ePDU provides reliable power to Data Centres for both standard and Blade servers.

Powerware ePDUs are available in multiple configurations and in both vertical (0U) and 19" horizontal rack mountings. Powerware Basic ePDUs ensure easy management and offer a scalable solution for your current and future requirements.

Key benefits include simplicity of use, rugged aluminium chassis, numerous standard built-in options, multiple choices of socket orientation and external earth tags, all designed to suit the latest rack and enclosure designs.

### Features

- **Up to 3 types of socket available in one ePDU**
- **High quality sockets** ensure maximum reliability
- **Isolation mounting** expands cabinet grounding options
- **Multi-option mounting** improves installation flexibility - have confidence that the strip can be adapted to suit any on-site rack configuration.
- **UK, C13 and C19 sockets as standard**, UK sockets available with a choice of orientation at 45-degree steps and feature self-adjusting cable terminations for increased safety and reliability. Ask for options on Schuko and French sockets.
- **Tough yet attractive aluminium body** with polycarbonate end caps for the ultimate in style and strength.

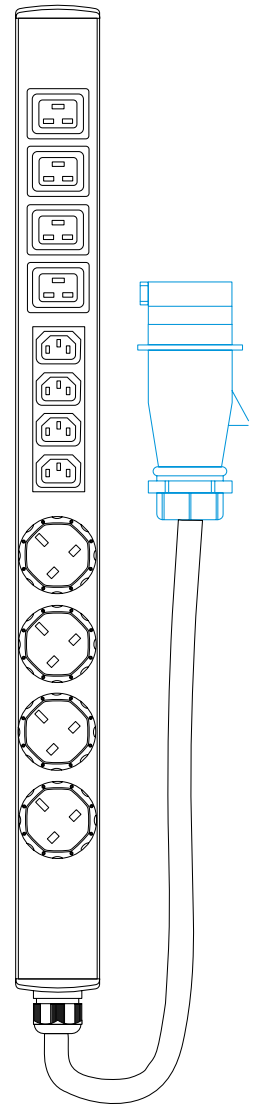

Basic

-

Metered

-

Monitored

-

Switched

-

Managed

# Technical specifications

Powerware ePDU Datasheets:  
Basic Technology, 32 Amp UK ePDUs

Part Number	Form*	Input Plug	Lead Length	Outlet type1	Qty	Outlet type 2	Qty	Outlet type 3	Qty	Dimensions HxWxD
PW107BA0UB60	0U	EN60309	3M	UK	12					788 x 57 x 48
PW107BA0UA10	0U	EN60309	3M	UK	16					1024 x 57 x 48
PW107BA0UA11	0U	EN60309	3M	UK	20					1264 x 57 x 48
PW107BA0UA12	0U	EN60309	3M	UK	24					1500 x 57 x 48
PW107BA0UA16	0U	EN60309	3M	UK	16	Ind F C13	4			1264 x 57 x 48
PW107BA0UA17	0U	EN60309	3M	UK	4	Ind F C13	16			1176 x 57 x 48
PW107BA0UA18	0U	EN60309	3M	UK	8	Ind F C19	8			1066 x 57 x 48
PW107BA0UB86	0U	EN60309	3M	UK	12	Ind F C19	4			1096 x 57 x 48
PW107BA0UA36	0U	Unterminated	2M	UK	16					1024 x 57 x 48
PW107BA0UA37	0U	Unterminated	2M	UK	20					1264 x 57 x 48
PW107BA0UA38	0U	Unterminated	2M	UK	24					1500 x 57 x 48
PW107BA0UA39	0U	Unterminated	2M	UK	16	Ind F C13	4			1264 x 57 x 48
PW107BA0UA40	0U	Unterminated	2M	UK	4	Ind F C13	16			1176 x 57 x 48
PW107BA0UA41	0U	Unterminated	2M	UK	8	Ind F C19	8			1066 x 57 x 48
PW107BA0UA48	0U	EN60309	3M	Ind F C13	16					988 x 57 x 48
PW107BA0UA49	0U	EN60309	3M	Ind F C13	20					1188 x 57 x 48
PW107BA0UA50	0U	EN60309	3M	C13	16					780 x 57 x 48
PW107BA0UA51	0U	EN60309	3M	C13	20					880 x 57 x 48
PW107BA0UA54	0U	EN60309	3M	Ind F C19	8					650 x 47 x 48
PW107BA0UA55	0U	EN60309	3M	Ind F C19	16					1130 x 47 x 48
PW107BA0UA56	0U	EN60309	3M	C19	8					668 x 57 x 48
PW107BA0UA57	0U	EN60309	3M	C19	16					1028 x 57 x 48
PW107BA0UA60	0U	EN60309	3M	Ind F C13	12	Ind F C19	4			1068 x 57 x 48
PW107BA0UA61	0U	EN60309	3M	Ind F C13	12	Ind F C19	8			1148 x 57 x 48
PW107BA0UA62	0U	EN60309	3M	C13	12	C19	4			860 x 57 x 48
PW107BA0UB61	0U	EN60309	3M	C13	16	C19	4			980 x 57 x 48
PW107BA0UA71	0U	Unterminated	2M	Ind F C19	8					650 x 47 x 48
PW107BA0UA72	0U	Unterminated	2M	Ind F C19	16					1130 x 47 x 48
PW107BA0UA73	0U	Unterminated	2M	C19	8					780 x 57 x 48
PW107BA0UA74	0U	Unterminated	2M	C19	16					880 x 57 x 48
PW107BA0UA75	0U	Unterminated	2M	Ind F C13	16					988 x 57 x 48
PW107BA0UA76	0U	Unterminated	2M	Ind F C13	20					1188 x 57 x 48
PW107BA0UA77	0U	Unterminated	2M	Ind F C13	12	Ind F C19	4			1068 x 57 x 48
PW107BA0UA78	0U	Unterminated	2M	Ind F C13	12	Ind F C19	8			1148 x 57 x 48
PW107BA0UA79	0U	Unterminated	2M	C13	12	C19	4			860 x 57 x 48
PW107BA2UB57	2U	EN60309	3M	C13	20					482 x 90 x 300
PW107BA0UB84	0U	Unterminated	2M	UK	8	C13	4	C19	4	1070 x 57 x 48
PW107BA0UB85	0U	EN60309	3M	UK	12	C19	4			1460 x 57 x 48
PW107BA0UB86	0U	EN60309	5M	UK	4	C19	12			1360 x 57 x 48
PW107BA0UB87	0U	EN60309	3M	C13	24					980 x 57 x 48
PW107BA0UB88	0U	EN60309	3M	C13	20	C19	4			1080 x 57 x 48
PW107BA0UB89	0U	EN60309	3M	C13	8	C19	8			980 x 57 x 48
PW115BA0UB90	0U	EN60309	3M	C19	8					800 x 57 x 75

Ind F = Individually Fused

Eaton, Powerware, ePDU are trade names, trademarks, and/or service marks of Eaton Corporation or its subsidiaries and affiliates.

© 2008 Eaton Corporation.  
All Rights Reserved.

[www.powerware.com](http://www.powerware.com)

CZECH  
Tel: +420 272 760 365  
[UPSInfoCzech@eaton.com](mailto:UPSInfoCzech@eaton.com)

FINLAND  
Tel: +358 9 452 661  
[PowerwareMyynti@eaton.com](mailto:PowerwareMyynti@eaton.com)

GERMANY  
Tel: +49 7841 6040  
[infogermany@eaton.com](mailto:infogermany@eaton.com)

NORWAY  
Tel: +47 23 03 65 50  
[SalesNorway@eaton.com](mailto:SalesNorway@eaton.com)

RUSSIA  
Tel: +7 495 981 37 70  
[UPSRussia@eaton.com](mailto:UPSRussia@eaton.com)

SWEDEN  
Tel: +46 8 598 940 00  
[infosweden@eaton.com](mailto:infosweden@eaton.com)

DENMARK  
Tel: +45 3686 7910  
[UPPSalesDenmark@eaton.com](mailto:UPPSalesDenmark@eaton.com)

FRANCE  
Tel: +33 1 60 12 74 00  
[powerware.france@eaton.com](mailto:powerware.france@eaton.com)

ITALY  
Tel: +39 02 95542 309  
[info@powerware.it](mailto:info@powerware.it)

POLAND  
Tel: +48 22 331 85 24  
[upssalespoland@eaton.com](mailto:upssalespoland@eaton.com)

SLOVAKIA  
Tel: +421 2 4463 7046  
[InfoSk@Eaton.com](mailto:InfoSk@Eaton.com)

UAE  
Tel: +971 4 881 19 33  
Fax: +971 4 881 1939

SPAIN  
Tel: +34 475 32 03  
[infoespana@eaton.com](mailto:infoespana@eaton.com)

UNITED KINGDOM  
Tel: +44 1753-608 700  
[acukpowerware@eaton.com](mailto:acukpowerware@eaton.com)



# Powerware